


**Model: SPE-B118WW**  
Installation guide



**Accessory list**


Attention: The drawings below are for guidance only and they may differ slightly from the product and fittings received. Please contact our customer service department should you have any queries.

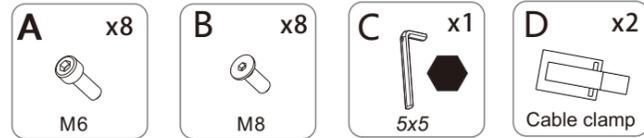

**Technical data**



Max. Weight Capacity	50KG
Height Range	730-1220mm
Drawer Stroke	230mm

**Component list**

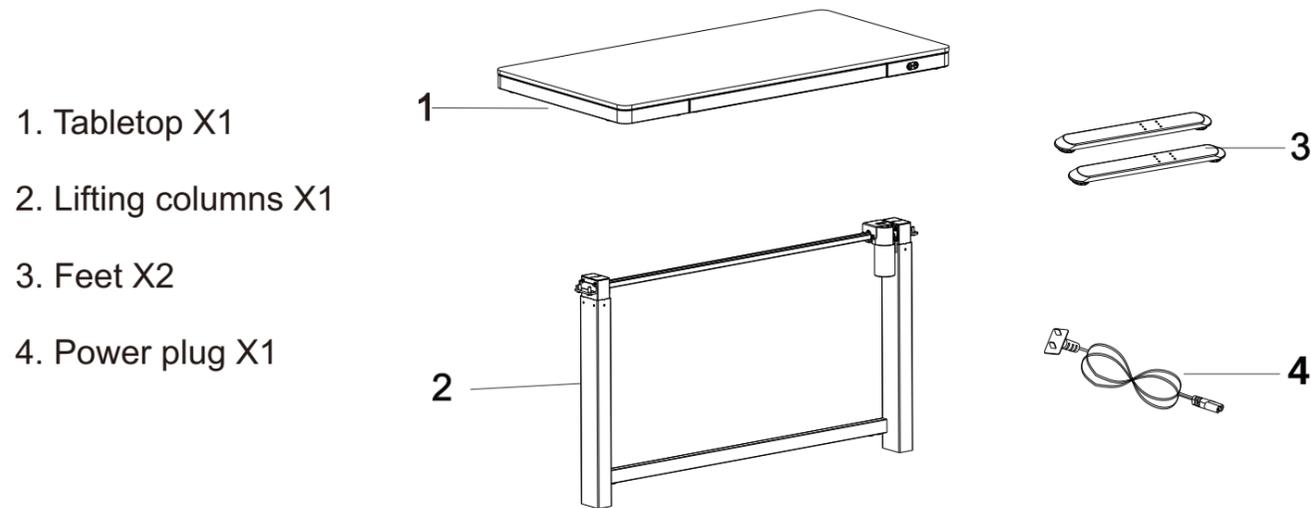

**STEP 1**



Install the tabletop and the lifting columns

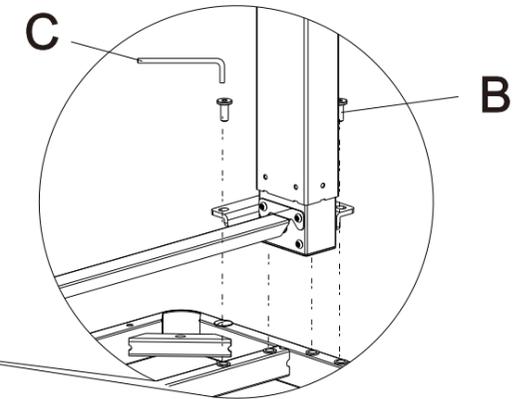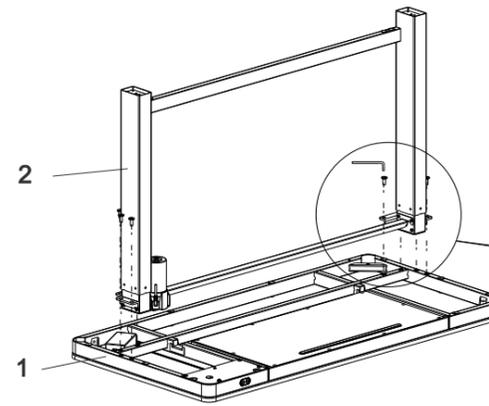

Connect the tabletop (1) and the lifting columns (2) with the screw (Bx8) M8 and tighten it with hex wrench (C).  
Caution: Please do not touch the glass surface directly to the ground during installation, so as not to be scratched by sharp objects on the table;

**STEP 2**



Install the feet

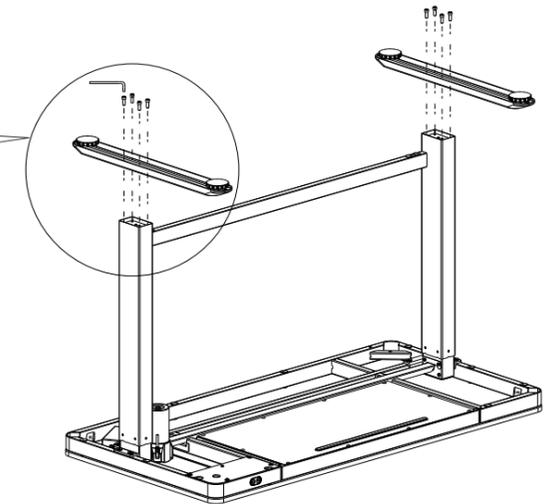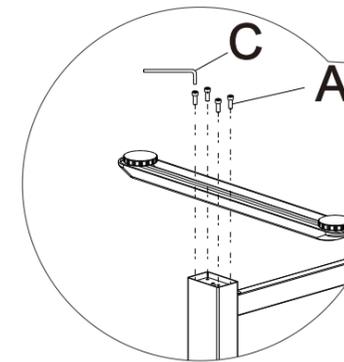

Install the feet (3) to the lifting columns with the screw M6 (A\*8) and tighten it with hex wrench (C)  
Caution: Pay attention to the directions.

**STEP 3**


Install the motor and power lines

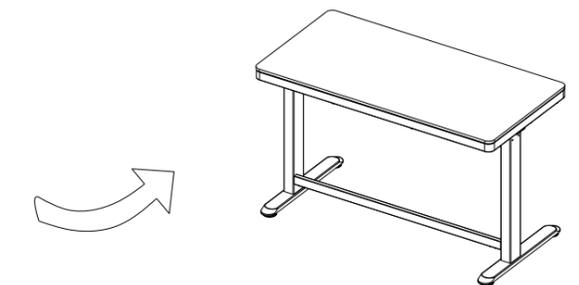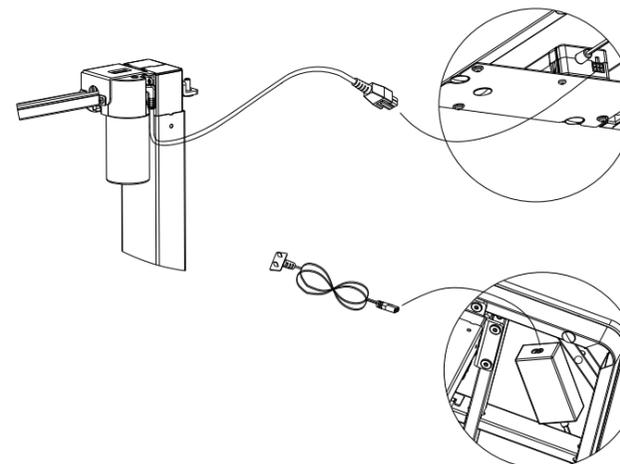

Connect the motor plug to the control box, then connect one side of the adapter plug to the adapter, another side to the power line.  
Caution: the motor and power lines can be fixed by cable clamp according to actual use.

## Operation Instruction

### Key button

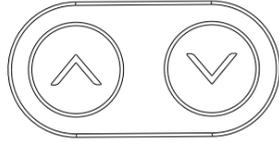

1. Press the UP/Down buttons to adjust the height of the desk;
2. Long press the UP/Down buttons about 1.2s to adjust the height of the desk automatically;
3. Press the UP and Down buttons simultaneously for 5s, there will be no response to the up button, continue to press the down button to enter the reset state.

### Common fault treatment

The following tips will help you detected and eliminate the common fault and error. If the fault you met is not listed below, please contact with your supplier. Only the manufacturer and professionals are capable for investigating and correcting those fault and error.

Fault phenomenon	Method
No response while long pressing down arrow after connected with a power supply	<ol style="list-style-type: none"> <li>1. Check if all the cables be connected well</li> <li>2. Contact your supplier or dealer</li> </ol>
No response while pressing up arrow/ down arrow after connected with a power supply	<ol style="list-style-type: none"> <li>1. Check if all the cables be connected well</li> <li>2. Contact your supplier or dealer</li> </ol>
Rising in a low speed	<ol style="list-style-type: none"> <li>1. Check if overloaded, max loading: 50kg;</li> <li>2. Contact your supplier or dealer</li> </ol>
The motor not move as instructed	<ol style="list-style-type: none"> <li>1. Contact your supplier or dealer</li> </ol>
Go down but not go up	<ol style="list-style-type: none"> <li>1. Reposition</li> <li>2. Contact your supplier or dealer</li> </ol>
Downward sliding	<ol style="list-style-type: none"> <li>1. Check if overloaded, max loading: 50kg;</li> <li>2. Contact your supplier or dealer</li> </ol>
Frequently Reposition	<ol style="list-style-type: none"> <li>1. Check if overloaded, max loading: 50kg;</li> <li>2. Contact your supplier or dealer</li> </ol>
Overwork (Duty cycle: Max 2min on/18min OFF)	<ol style="list-style-type: none"> <li>1. Restart after suspend for 18mins while connecting with power;</li> <li>2. Contact your supplier or dealer;</li> </ol>



### Attention

1. Power supply: AC100V-240V,50/60Hz
2. Service Environment: 0-40°C
3. Unplug the power plug before cleaning, wipe the dust on surface with slight wet dishcloth when cleaning, be careful not to let the drops into the internal parts, not loose the connector.
4. The electric box contains electronic components, metals, plastics, wires etc., so dispose of it in accordance with each country's environmental legislation, not the general household waste.
5. Check carefully to ensure correct and complete assembly before using.
6. Be familiar with all functions and program settings of the product before first use.
7. Children are forbidden to play on the product because of unforeseen action when playing, so any dangerous consequences caused by this improper action will not be on
8. Slight noise caused by the V-ribbed belt or brake system due to structure will not have any effect on the use of the equipment.
9. Corrosive or abrasive materials are forbidden to clean the equipment. Must ensure that the cleaner used will not pollute the environment.
10. This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance.
11. Cleaning and user maintenance shall not be made by children without supervision.
12. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or a similarly qualified person in order to avoid a hazard.
13. Please make sure there is no hazard sources in your operating environment. e.g., do not litter the tools around. Always be careful to treat the packaging materials in order to avoid any possible danger, e.g. plastic bag may lead to choking hazard to children.
14. Keep the original package of the equipment if necessary in case of the future use in transportation.

### Waste disposal



This marking indicates that this product should not be disposed with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Made in ChRL for  
**DMTrade Mikołaj Tomaszewski**  
 Wiśniowa 36, 64-000 Kościan, Poland

NIP: PL6981681757  
 email: sklep@dmtrade.pl  
 phone #1: +48 661 082 052  
 phone #2: +48 726 082 052

[www.ergoline.spacetronek.eu](http://www.ergoline.spacetronek.eu)