


KIT erlea

2 WIRE 7" VIDEODOORPHONE KIT FOR VILLAS

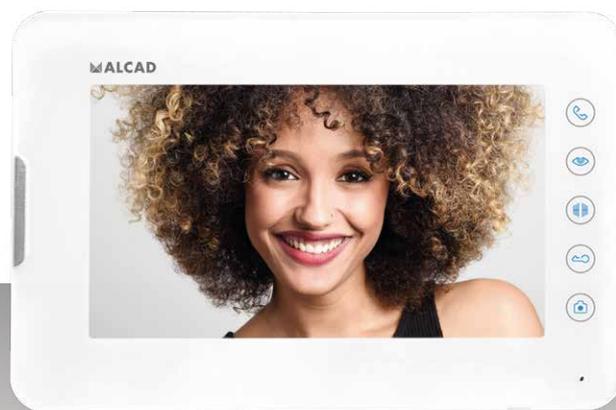

- * Automatic capture of images for unanswered calls
- * High quality 2-wire technology, installable with any type of cable (compatible with 0,25mm² cable up to 100 meters)
- * DIN rail power supply for professional installations
- * Outdoor station made of aluminum zamak material with robust and highly resistant design
- * 7-inch hands-free monitor with capacitive touch buttons

Description



2-Wire video door entry system kit for villas.

This video entry system gives you full control over the access of visitors to your property and, in addition, it allows you to identify the person who calls.

The automatic switch-on system makes it possible to see the image captured by the entrance panel camera without having first to receive a call. Moreover, the automatic switch-on function is useful in situations of surveillance or when you wish to communicate with the entrance panel for whatever reason.

As an additional feature, the monitor keeps an automatic picture record of visitors whose calls have been unanswered. When a call is not answered, the monitor automatically saves an image of the person making the call. This Kit includes a DIN rail power supply, for a professional installation.



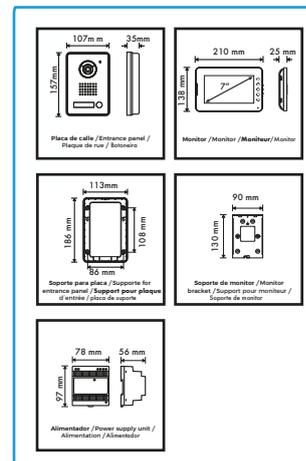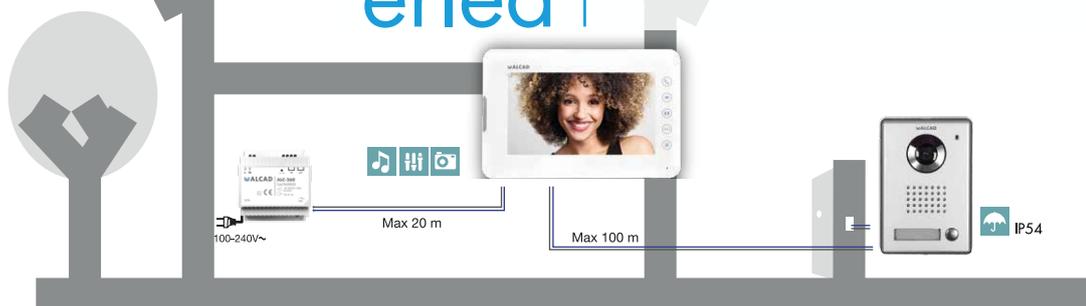

MAIN FEATURES

9720156 KVS-31121

ENTRANCE PANEL

Specifications	
Color camera	1/3" color CCD; 1.5lux; Angle 62~90°
Connection	2 wires (non-polarized)
Power Consumption	≤0.7W (standby) ; ≤6W (working)
Cable Length	0.25 mm ² up to 100 meters
Call Time	90s
Talk/Monitor Time	60s
Communication	handsfree
E-LOCK	Working Voltage: DC12V
	LOCK RESISTANCE 10Ω~50Ω, Lock maintain current: ≤150mA
Ambient Temperature	-30~+70°C
Installation	surface mount
Product Dimensions(W×H×D)	106.9mm × 157mm × 36.3mm

MONITOR

Specifications	
Input Voltage	DC18V
Power Consumption	≤5W(standby) ; ≤15W(working)
Screen	7" color LCD
Cable & Cable Length	cable to Outdoor Camera: 2 wires (non-polarity; 0.25 mm ² up to 100 meters)
Call Time	call from Outdoor Camera: 90s
Talk/Monitor Time	60s
Ringtone	9 chord ringtone
Capacity for snapshots	auto- captured:20 groups(3pcs/group) manual-captured:50 pcs
Communication	handsfree
Ambient Temperature	-10~+55°C
Installation	surface mount
Dimensions (W×H×D)	208mm × 138mm × 25mm